


RUBY 70



Nature - Light Raspberry, Raspberry and Orange Red

Nature

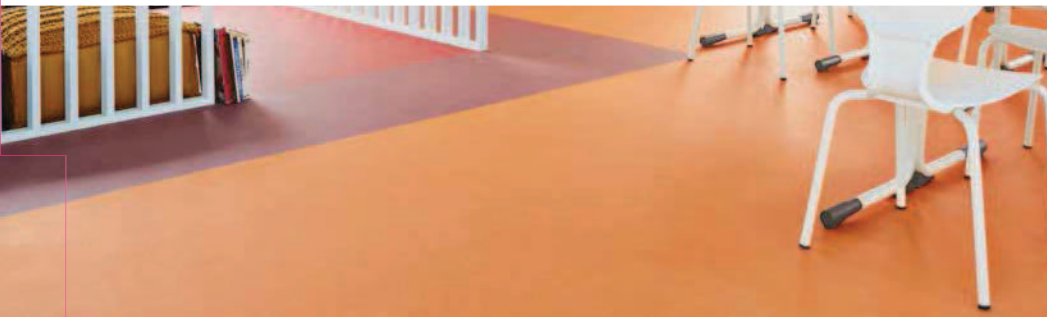

	Middle Grege		Warm Medium Grey				Cold Dark Grey
	Cold Grey		Black		Yellow		Sand
							Cold Medium Grey
	Tomato		Fresh Blue		Dark Grege		Dark Blue
	Raspberry		Lilac		Royal Purple		Spring Green
							Turquoise

TECHNICAL DATA	STANDARDS	RUBY 70	RUBY 70 Acoustic
Classification			
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl	Resilient floor covering - Polyvinyl chloride floor covering with foam layer
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43	Classes: 34 42
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	3.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²	2 500g/m ²
PU treatment	-	TopClean™	TopClean™
Wear layer binder content	ISO 10582	Type I	Type I
Technical performance			
Residual indentation	Average measured value	0.02mm	0.11mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN 13501-1	B ₁ -s1 Glued on derivative wood panel	C ₁ -s1 Glued on derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30	R9 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%	≤ 0.10%
Furniture leg	EN 424	No damage	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance	High resistance
Hygiene	-	Does not contribute to infection spreading	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Impact Sound Resistance	Standards EN ISO 10140-3 EN ISO 717/2	ΔL _w = 5dB	ΔL _w = 19dB

The above information is subject to modifications for the benefit of further improvement (02/2017).

For more detailed technical information, please contact Tarkett.

	Royal Blue		Cognac
	Orange Red		

RUBY 70 Nature

Main Product Features

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag



Logistics Information



Laying direction:

General Information



RUBY 70



Faro 2 - Natural Honey

Hausmann



Natural

2509 8069
2509 9069



Dark Grey

2509 8070
2509 9070



Warm Brown


2509 8071
2509 9071

Faro 2



Natural

2509 8034
2509 9034



Anthracite

2509 8072
2509 9072

Oak



Warm Beige

2509 8073
2509 9073



Grey

2509 8036
2509 9036



Grey Beige

2509 8035
2509 9035



Middle Natural

2509 8074
2509 9074




Natural Honey

2509 8075
2509 9075



Beige

2509 8076
2509 9076



Dark Brown

2509 8077
2509 9077



TECHNICAL DATA	STANDARDS	RUBY 70
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial Industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	Average measured value ISO 24343-1 (EN 433) requirement	0.02mm ≤ 0.10mm
Reaction to fire	EN 13501-1	B _s -s1 Glued on derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact Sound Resistance	Standards EN ISO 10140-3 EN ISO 717/2	ΔLw = 5dB

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Hetre Fayard



Light Natural

2509 8029
2509 9029

RUBY 70 Wood

Main Product Features

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls:
2m & 4m
Rolls length: 231m

Laying direction:



Wood

General Information



According to European
Classification ISO 10874 (EN 685)